

AVer HVC130

HD Quality Video Conferencing System

Smart, Efficient, Economical

- 5M PTZ, 7X Optical Zoom camera
- Snapshot sharing & VC control via mobile devices
- Wireless content sharing via PC
- Advanced daisy chain MIC support
- RS-232 port for easy A/V integration



Product Specifications & Features

Camera

- 5-megapixel CMOS camera
- 7X Optical Zoom
- PTZ function
- F = 3.325~3.675; fl = 6~60mm
- 30cm MOD
- 62° FOV

Display

- Supports XGA (4:3 RGB) / HD720p (16:9 RGB)
- Supports Single and Dual Monitor display
- Multiple layout styles
- User-friendly OSD (supports 20 languages: English, Traditional Chinese, Simplified Chinese, Czech, Danish, Dutch, Finnish, French, German, Hungarian, Italian, Japanese, Korean Norwegian, Polish, Portuguese-Brazil, Russian, Spanish, Swedish, Thai)
- Display / Edit site name

Communication

- H.323 and SIP standard
- 128Kbps~4Mbps
- 1xRJ-45 network LAN (10/100Mbps)
- Manual bandwidth settings

Video Standard

- H.264, H.263, H.263+, H.261
- H.239 dual video streams

Audio Standard

- G.711, G.722, G.722.1, G.728, G.722.1C

Other ITU-Supported Standards

- H.224 / H.281 far-site camera control
- H.225, H.245
- H.323 Annex Q far-site camera control
- H.239 Dual Stream / Content Sharing
- H.460 NAT / firewall traversal

Video Feature

- Video conferencing resolution:
 - QSIF (176x120), QCIF (176x144)
 - SIF (352x240), CIF (352x288)
 - 4SIF (704x480), 4CIF (704x576)
 - HD720p (1280x720)
- Content sharing resolution:
 - VGA (640x480)
 - SVGA (800x600)
 - XGA (1024x768)
 - SXGA (1280x1024)
- Supports Rate Control mechanism
- Supports H.239 content stream shared from local or remote side

Video Input

- PTZ Camera input
- S-Video input
- VGA input (For dual stream content)

Video Output

- HDMI output
- VGA output

Audio Feature

- Echo cancellation
- Auto Gain Control (AGC)
- Noise suppression

MIC Input

- AVer MIC in
- Aux. MIC in from mini XLR connector
- MIC in (3.5mm)

Audio Input

- Audio in (3.5mm)

Audio Output

- HDMI Audio out
- RCA Audio out

Security

- Restricted access to WebTool and System Settings
- AES (Advanced Encryption Standard) Function

Web Management Tool

- Remote management through Web
- Live monitoring function from Web
- Remote control App on iOS & Android
- RS-232 interface for API
- Phonebook download / upload / edit
- Firmware update via Ethernet / Internet
- Save system settings

Other Features

- Firmware update via Ethernet or USB flash drive
- Screensaver and Auto Power Off mode
- Snapshot images and live images can be shared via mobile devices

Dimensions and Weight

- Package: 7.6kg (16.7lbs)
- Main System: 320 x 259.6 x 27 mm
- Camera: 160 x 141 x 89.5 mm
- Microphone: 118 x 116 x 21 mm

Power Supply

- AC 100V~240V, 50/60Hz
- Consumption: DC19V, 3.42A

Environment

- Operation Temperature: 0~40 °C
- Operation Humidity: 20%~80%
- Storage Temperature: -20~60 °C
- Storage Humidity: 20%~80%

Package Content

- Main System unit
- HD PTZ camera
- Microphone
- IR remote control with batteries
- Manual CD
- L-Bracket (camera stand)
- VGA cable (6M)
- Phone to RCA cable
- S-Video to RCA converter
- 26-Pin D-Sub cable (Camera cable, 1.5M)
- RJ-45 cable
- MIC cable (10M)
- Mini XLR converter
- Power adapter
- Power cord

Warranty

- 3-year* parts and labor (return to factory)

*For detailed warranty information, please visit communication.aver.com/warranty

Software

VCPlayer

System Requirements

- Intel® Pentium® 4 or AMD Athlon® XP or higher processor; 2.4GHz Pentium® 4 or Intel® Core™ 2 Duo or above
- Windows® XP (SP2) or later
- 512MB RAM or above
- 50MB of available hard-disk space
- For file converter function, you will need Intel® Core™ 2 Duo 2.8GHz and 1G RAM or above

ScreenShare for PC

System Requirements

- Intel® Atom 1.6GHz or above
- Windows® XP (SP2) or later
- 1G RAM or above

VCLink for mobile devices

System Requirements


- VCLink Android : Android 1.5 or above
- VCLink iPhone : iOS 4.2.1 and iPhone 3Gs or above



Minimum Bandwidth Requirement

Resolution	Bandwidth
4CIF (704x576) / 4SIF (704x480)	256Kbps
HD720p30fps (1280x720)	1Mbps (Point to Point Only)

Main System

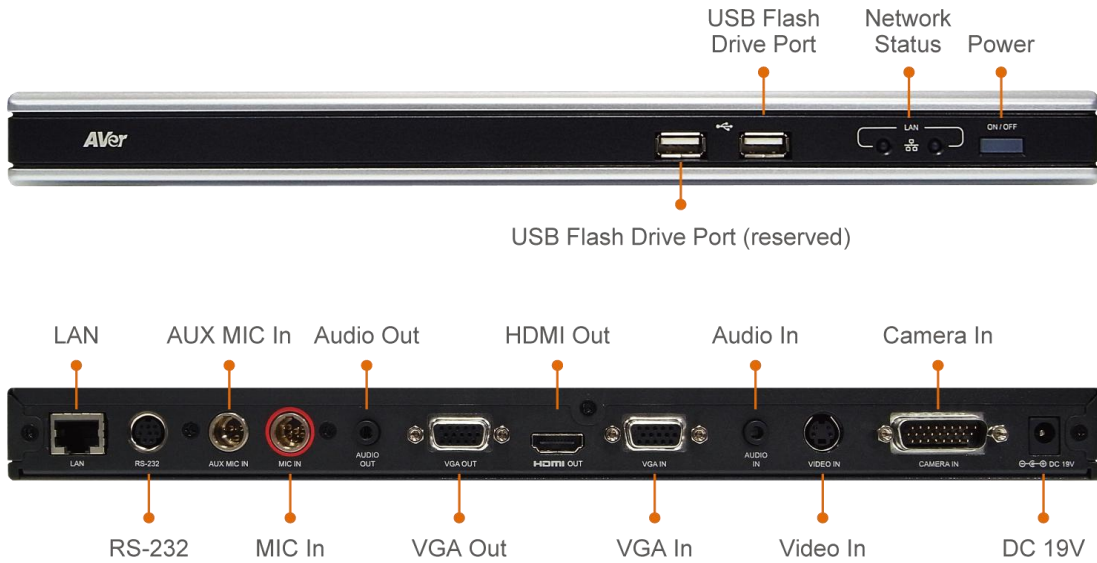

Camera



Microphone



Remote Control



L-Bracket

